

S/PDIF BOARD INSTALLATION
FOR IN & PR SIGNATURE


Before any operation, switch off your appliance.

1) Unscrew the rear plate (3 screws).


2) Place the plastic cover for the Bluetooth antenna and the USB input. This board is compatible with IN200 Sig from serial number 617659, and PR300 Sig from serial number 626210 then use the cover below for the USB input:



Engage the board and screw the board to the chassis.

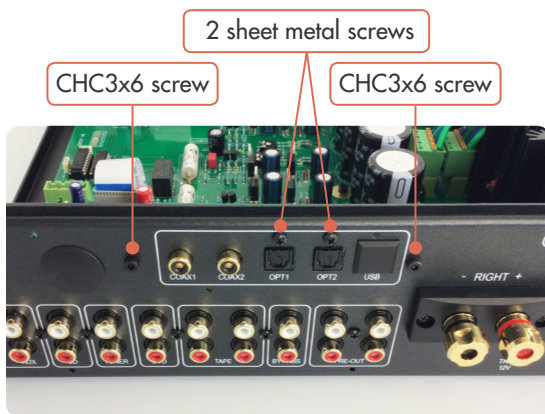

3) Plug the flat cable in the main board connector.

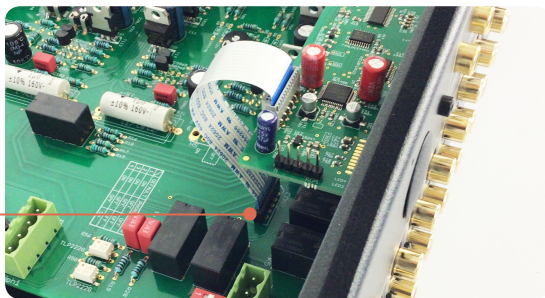

In case of IN50, 80, 100 and PR200 Signature it is necessary to wait 5 seconds of initialization before being able to exit standby at the first power on.



Reminder: The DA100 digital board includes:

- 2 Coaxial inputs (24 bits/192 kHz).
- 2 Optical inputs (24 bits/192 kHz).



Download your owner manual here:

<https://www.atoll-electronique.com/en/presse-support-2/>