


EV03 Sequel

EV03 Sequel power cable offers increased performance over IsoTek's multi-award winning EV03 Premier. Coming in a standard 2 metre length, it features specially optimised conductor strand geometry and active shielding for superior performance.

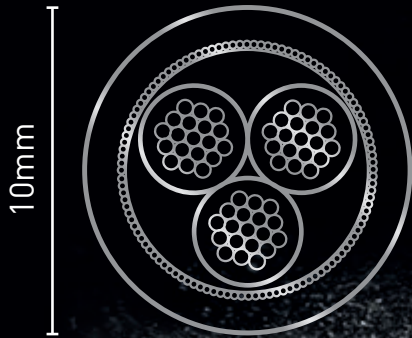

Composition


1. Pure silver plated 6N oxygen free copper for better conductivity
2. 2.0sqmm conductors give greater amperage
3. Thicker conductor strands improve performance
4. Fluorinated Ethylene Propylene (FEP/ Teflon) allows increased performance
5. Multi-strand cotton filler mains dielectric constance
6. Maylar wrap improves Common Mode noise rejection and maintains cable structure
7. Oxygen free copper braid increases Common Mode (RFI) noise rejection
8. Flexible PVC jacket

"Sequel is well built and keenly priced and gives source equipment in particular a performance boost."

Hi-Fi Choice Magazine

"The Sequel is a high quality, very rugged power cord. Sonically, the cable provides improvement in nuances and details. If you want to exploit your systems potential, you should try Sequel."

Lite Magazine Germany

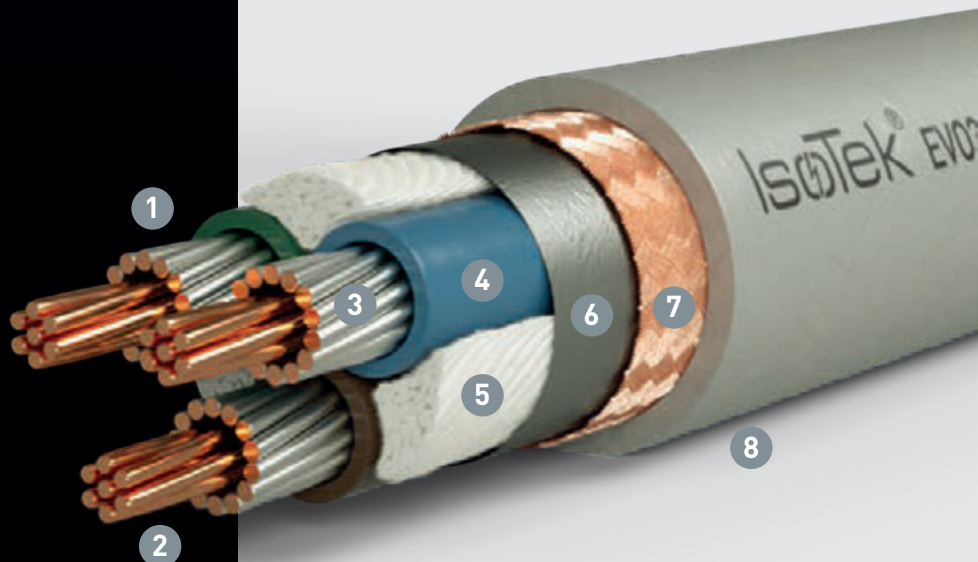

Specifications

Conductor Size: 3 x 2.0sqmm
(increased diameter conductor strands)

Conductor Material: Silver plated
99.9999% Oxygen free copper

Dielectric: Fluorinated Ethylene Propylene (FEP)

Dialectric Constance: 2.1

Filler: Cotton

PVC Barrier: Mylar

Shield: Oxygen free copper braid (OFC)

Outer Jacket: High flexibility PVC

Power Rating: 16Amp

Cable Length: 2.0m standard
(custom lengths available)

Outer Diameter: 10mm

Termination: Audiophile-grade connectors,
90% copper/10% zinc (CuZn10) with
24ct gold plating

Suitability

Suitable for midrange and higher performance audio separates, CD players, DACs, preamps, tuners, power amps, Blu-ray players, music servers, TVs, soundbars and more!

Cable connector options

