

Table of Content

English	02
French	13
Spanish	21
German	29
Japanese	37
Korean	45
Finnish	53
Swedish	61
Italian	69
Polish	77


1 Front View



Volume Knob – Turn to adjust the volume level.

Mode Switch – Tap to switch the audio input.

2 Rear View

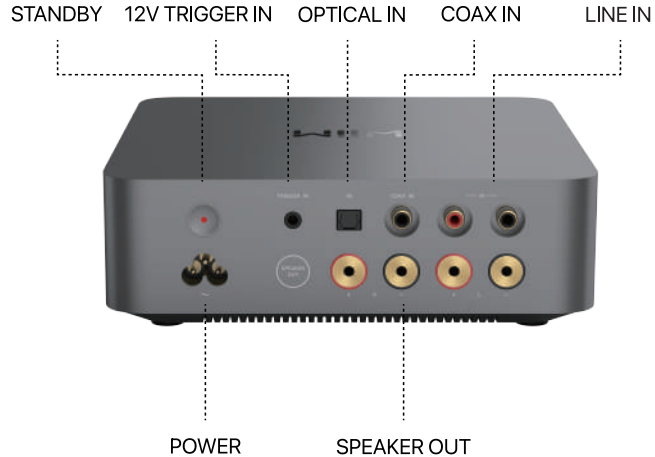


Standby

1. Tap to enter or exit standby.
2. Press and hold for 2 seconds and no more than 5 seconds to power on/off.
3. Press and hold for 5 seconds or more to restore to factory setting.

3 Connect Steps


3.1 Connect with your passive speaker

Connect your passive speakers using either banana plugs or speaker wire. Make sure to correctly match the positive (+) and negative (-) terminals on both the amplifier and the speakers for optimal performance.

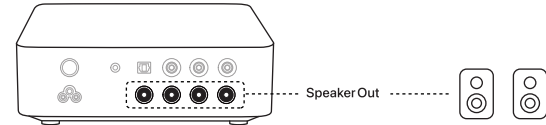


3.2 Connect with your source devices

Easily connect your WiiM streamer - whether it's the WiiM Ultra, Pro/Pro Plus, or Mini - to the Vibelink Amp using either the analog or digital inputs. Even without a WiiM streamer, you can enjoy high-quality audio by connecting your turntable or TV through the digital optical, coaxial, or analog line inputs.

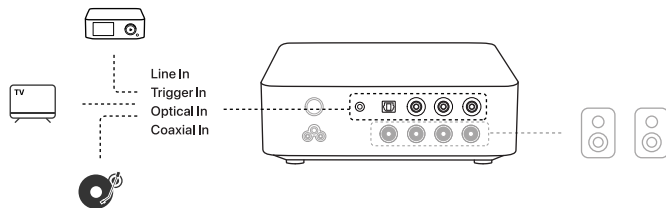

3.3 Plug in power



4 Specifications

Items	Description
Type	Two - channel power amplifier
Rated power output (from 20 Hz to 20 kHz / THD = 1 %, two channels driven)	Optical / Coaxial: 200 W / ch, 4 Ω 100 W / ch, 8 Ω RCA: 120 W / ch, 4 Ω 60 W / ch, 8 Ω
Maximum effective output power (from 1 kHz, two channels driven)	200 W / ch, 4 Ω (Optical / Coaxial) 120 W / ch, 4 Ω (RCA)
Output bandwidth (50 W, 8 Ω , 0.05 %)	6 Hz - 80 kHz
Frequency response (1 W, 8 Ω)	5 Hz - 50 kHz (± 3 dB)
Damping factor	94
Input sensitivity / impedance	2 V / HI - Z (UNBALANCED)
Total Harmonic Distortion + Noise(Digital input)	-105dB(A - wt, 8 Ω)
Signal-to-noise ratio (IHF - A)	120 dB
Voltage amplification level	23 dB
Supply voltage	100 - 240V, 50 / 60Hz
Power consumption	500 W
Standby power	0.5 W
Maximum external dimensions	200 (W) $\times$ 63 (H) $\times$ 200 (D) mm
Weight	2.05 kg

5 Statement of Compliance on Security Software Updates

Linkplay Technology, Inc. hereby declares compliance for the products under its purview with the security standards outlined in Schedule 1 of The Product Security and Telecommunications Infrastructure (Security Requirements for Relevant Connectable Products) Regulations 2023, in accordance with the Product Security & Telecommunications Infrastructure Act 2022 mandated by the UK government.

Linkplay commits to delivering software security updates for the listed products, as detailed in the subsequent table. These updates are accessible and manageable through the 'Settings' section of the WiIM Home mobile application.

Product Table

Linkplay Products	Launch Date	Security Update Period
WiIM Mini	Sept. 26, 2021	Dec. 31, 2026
WiIM Pro	Oct. 20, 2022	Dec. 31, 2026
WiIM Pro Plus	Aug. 8, 2023	Dec. 31, 2026
WiIM Amp	Nov. 22, 2023	Dec. 31, 2026
WiIM Amp Pro	Aug. 15, 2024	Dec. 31, 2026
WiIM Ultra	July. 6, 2024	Dec. 31, 2026
WiIM Wake-up Light	April 11, 2023	Dec. 31, 2026
WiIM CI MOD S	Sept. 5, 2024	Dec. 31, 2026
WiIM CI MOD A80	Sept. 5, 2024	Dec. 31, 2026
WiIM Vibelink Amp	Mar. 15, 2025	Dec. 31, 2026

6 IMPORTANT SAFETY INSTRUCTIONS

Model Name : V-AMP-001

IMPORTANT, RETAIN FOR FUTURE REFERENCE: READ CAREFULLY

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
10. Only use attachments/accessories specified by the manufacturer.
11. Unplug this apparatus during lightning storms or when unused for long periods of time.
12. Refer all servicing to qualified personnel. Servicing is required when the apparatus has been damaged in any way, such as external power supply, power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

13. To reduce the risk of fire or electrical shock, do NOT expose this product to rain, liquids or moisture.

14. Do NOT expose this product to dripping or splashing, and do not place objects filled with liquids, such as vases, on or near the product.

15. Keep the product away from fire and heat sources. Do NOT place naked flame sources, such as lighted candles, on or near the product.

16. Do NOT make unauthorized alterations to this product.

17. Do NOT use in vehicles or boats.

18. Use this product only with the power supply provided.

19. Where the mains plug or an appliance coupler is used as the disconnect device, the disconnect device shall remain readily operable.

20. Due to ventilation requirements, does not recommend placing the product in a confined space such as in a wall cavity or in an enclosed cabinet.

21. Contains small parts which may be a choking hazard. Not suitable for children under age 3.

22. This product contains magnetic material. Consult your physician on whether this might affect your implantable medical device.

23. Do not place or install the bracket or product near any heat sources, such as fireplaces, radiators, heat registers, or other apparatus (including amplifiers) that produce heat.

24. By means of a power cord connected to a socket-outlet with earthing connection.

FCC/IC Statements

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications or changes to this equipment. Such modifications or changes could void the user's authority to operate the equipment.

Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme avec Industrie Canada RSS exemptes de licence standard(s). Son fonctionnement est soumis aux deux conditions suivantes:

- (1) cet appareil ne peut pas provoquer d'interférences, et
- (2) cet appareil doit accepter toute interférence, y compris celles pouvant causer un mauvais fonctionnement de l'appareil.

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

CE Statements

Do not use the device in the environment at too high or too low temperature, never expose the device under strong sunshine or too wet environment. The suitable temperature for the product and accessories is 0°C-40°C.

This product can be used across EU member states.

EU Regulatory Conformance

Hereby, Linkplay Technology Inc. declares that this device is in compliance with the essential requirements and other relevant provisions of EMC directive 2014/30/EU and LVD directive 2014/35/EU.

For the declaration of conformity, visit the Web site www.wiimhome.com/certification.

7 Need help?

WiiM Home app: More > FAQ

Website: wiimhome.com/support

Email: support@wiimhome.com

Product user guides: wiimhome.com/wiimvibelink_amp/guides

 @wiimhome

 @wiimhome

 @wiimhome

 @wiimhome